


Leading the way in security

Scantronic

9752 HYBRID SECURITY SYSTEM

CONTROL PANELS

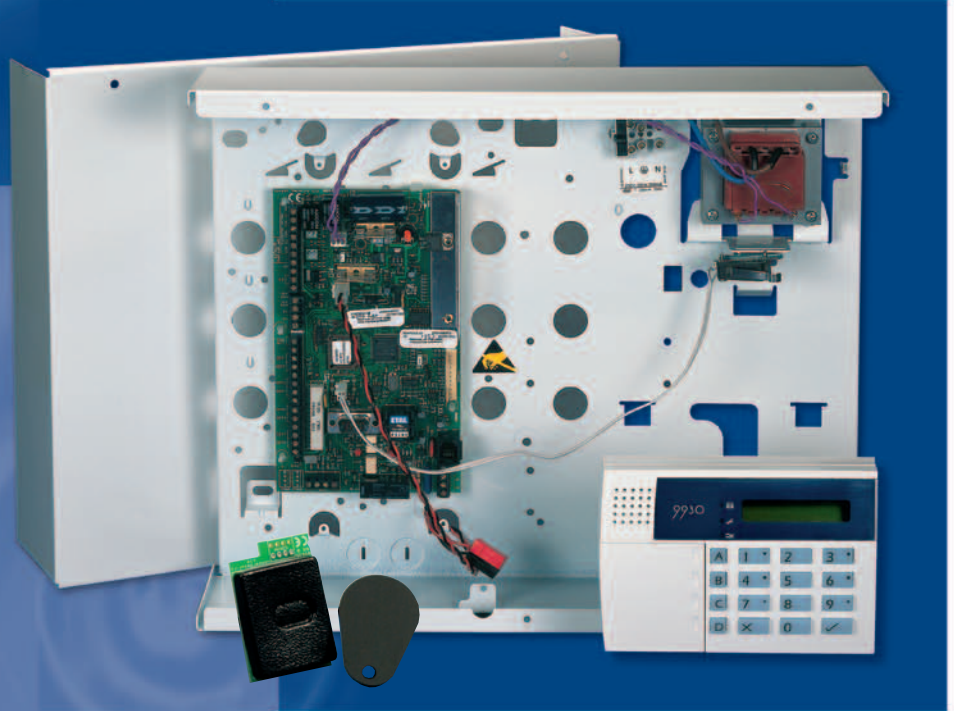

9954



715R



9960



725R



735R



726R



719R



9928



934EUR-50



The Scantronic 9752 is a fully programmable, 8 zone security panel. With expansion capability of up to 32 zones using wired or Class VI wirefree expanders operating on 868 MHz narrow band frequency, the 9752 provides flexibility whatever the installation requirement. The wirefree expander eliminates the need for complex wiring between devices with the minimum disruption to your décor during installation.

The 9752 is ideally suited to home security and small commercial security applications and has been designed to offer maximum flexibility and ease of use. It has simple A, B, C and D setting options, providing full and part set options. Up to 4 remote keypads can be added to the system allowing easy operation from any location within the protected premises using either a 4 digit code or encrypted proximity tag.


To reduce maintenance time, the 9752 has upload/download capabilities allowing the installer to program and perform diagnostic tests remotely. As well as the built in modem for communications, the system has secondary outputs to operate other communication devices.

Leading the way in security

Scantronic

9851 HYBRID ALARM SYSTEM

CONTROL PANELS

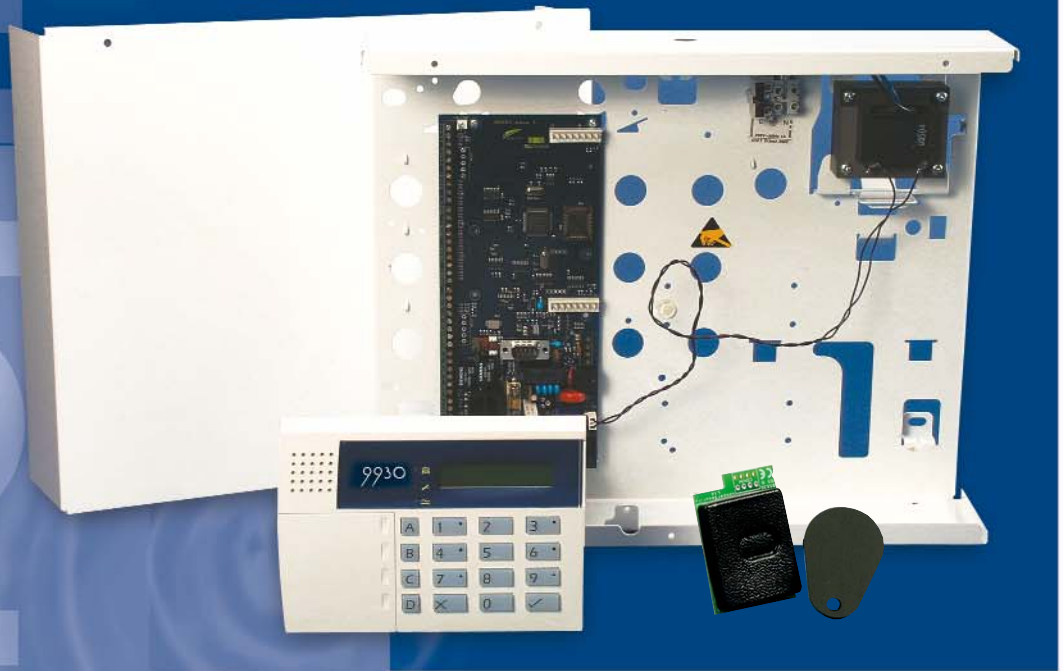

9954



715R



9960



725R



735R



726R



719R



9928



934EUR-50

The Scantronic 9851 control panel is a fully programmable, 8 or 16 zone alarm panel, which can be expanded to 40 zones.

The system can be expanded using hardwired or Class VI 868 MHz narrow band wirefree technology ensuring flexibility whatever the installation requirement. The wirefree expander eliminates the need for complex wiring between devices with the minimum of disruption to your decor.

The 9851 is ideally suited to the small and medium size commercial market. Designed to offer maximum flexibility and ease of use, up to 4 remote keypads can be housed in separate locations of the building. Exceptionally easy to operate using large backlit A, B, C and D buttons you can have level setting or 4 partition options of the whole premises, ground floor only or any other plan that suits your particular setting requirements.

Upload and download technology is available using a Windows based program, which greatly reduces maintenance time by allowing the engineer to diagnose and program the system remotely. Additionally, the 9851 has a 250 event log which is locally printable and downloadable.

There is a built in 2400/300 baud CCITT V21 full duplex modem for communications and secondary communications outputs for other devices.

9851 HYBRID ALARM SYSTEM

TECHNICAL SPECIFICATION

Zones	8/16 fully programmable, expandable to 40 (CC, 4 wire, with separate tampers, or 2 Wire EOL or FSL)
Zone Attributes	Each zone can be programmed as one of the following types - personal attack, fire, normal alarm, final exit, 24 hour, entry route, not used, shock analyser (zones 1-4 only), technical alarm, key-switch (fixed and momentary options), key box anti mask, attributes of chime, soak test, double knock, omit allowed 9851 Blank end station control panel and 9930 LCD keypad packaged as a kit
Panel	
Keypads	Accepts up to 4 x 9930 LCD remote keypads
Proximity Reader	A plug-on module that turns a Scantronic keypad into a combined keypad & proximity reader – compatible with 9930-EUR-50 keypad
Display	9930, Full feature LCD display with plain text up to 16 characters
Level Setting	A = Full Set, B, C & D as Part set or 4 Partitions ABCD
Event Log	250 event log with date and time stamped, viewed or downloaded
Expansion	Via a choice of 4 x 8 zones hardwired or 4 x 8 zones 868MHz "Class VI" narrow band radio expansion or a combination
Compliance	BS4737 Part 1 for remote signalled systems, ACPO 2000, DD243:2002, DD244 & BS6799 "Class VI" radio
Keyswitch	Via key-switch zone type, full = A, part = B setting/unsetting, disarm and reset.
Codes	16 x 4/6 digit user access codes, 1 duress code, 1 engineer code
Internal Sounder	Accepts up to 2 x 16 ohm internal sounders, exit/entry tones via internal sounder with electronic volume control
Outputs	Outputs 1 and 2 are Relays and Outputs 3 and 4 are open collector. All outputs programmable as bell, exit/entry follow, armed lamp, set latch, shock reset, walk test (LED enable), ready lamp, 24 hour alarm, strobe, smoke reset, strobe when setting, siren test, pulsed set, pulsed unset, confirm, set complete, unset complete
Remote Communications	Multi-format alarm reporting via a built in communicator, 8 channel fast format, SIA I, II or III or Contact ID
Modem	Built in 2400/300 baud CCITT V22 DIS/V21 full duplex
Local Programming	Built-in RS232 Serial port @ 12 volt levels for local connection to a Laptop PC for programming and diagnostics
Downloader	Remote downloader facilities for programming, diagnostics and remote control using Cooper Security Multi-Product downloader software, Windows based, Secure Callback (with dynamic third callback number), answerphone defeat option and unattended mode, Manual call out
Remote Diagnostics	Designed to conform to the BSIA Remote Service COP, remote tests include read Zone's resistances (panel & expander), zone activity, RFX signal strength, PSU voltages, current, battery charge and system on load current, remotely trigger output tests, communications test, operate system with a virtual keypad
Servicing	Conforms to EN50131-6 Type A power supply
Power Supply	Stand by battery 12 volt, 7Ah or 17Ah rechargeable lead acid, gel type
Battery	1.3 Amp
System Power Supply	500mA@ 13.7 volts
Aux DC Power for Detectors	Control Panel (H x W x D) = 312 x 384 x 95mm, keypad (H x W x D) = 120 x 170 x 27mm.
Dimensions	Control panel = 5.0kg, keypad = 260g
Weight	-10°C to 55°C
Temperature Range	Wire in or plug-on BT RedCARE STU or any other type of secondary communications device via
Secondary Communications	8 Fully Programmable secondary communications plug by and 8 fixed plug-on outputs
Outputs	9930EUR-50 LCD keypad – ScanProx compatible
Scantronic Compatible	9954EUR-00 Hardwired 8 Zone Expander (FSL or CC, with common tamper, diagnostics ready)
Equipment	9960EUR-08 868MHz 'Class VI' Radio Expander 8 zones
	9960EUR-16 868MHz 'Class VI' Radio Expander 16 zones
	735REUR-00 Door Contact Transmitter
	715REUR-50 Wireless PIR Detector
	719REUR-00 Smoke Detector c/w 868MHz Tx
	725REUR-00 Telecommand Set/Unset + PA Tx
	726REUR-00 2 Button Hand Held PA
	958EUR-00 Windows Downloader PC Software
	934EUR-50 ScanProx module with 2 tags
	Proxtagpk5 – 5 tag set
	735REUR-50 Roller Shutter Transmitter

Scantronic is a leading brand of Cooper Security Ltd, part of Cooper Industries, which employs over 28,000 people at more than 100 manufacturing sites around the world.

Scantronic manufactures security equipment for all types of commercial and domestic premises. The range is comprehensive, offering every type of solution from multizone hard-wired and wirefree systems, to digital and voice communicators, detectors and social alarms. Installers trust us to deliver cost effective products with the highest quality of field and support services, ensuring you receive the best and most reliable systems to secure you and your premises and give you peace of mind.

www.scantronic.co.uk

Dealer Details

SCAN 07/04



COOPER Menvier

Scantronic
Leading the way in security